


# Sensor Cable SEC 20

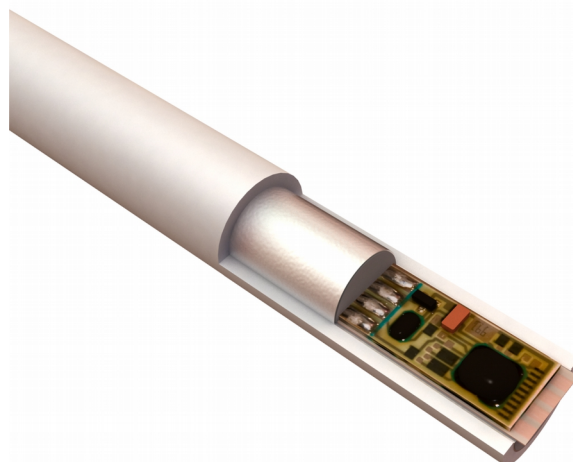

## Features

- ◆ Complete encapsulation to protect sensors from environmental influences
- ◆ Flexible sensor spacing to comply to project demand
- ◆ Pinpoint sensor location via individual addresses
- ◆ Maintenance free cable
- ◆ Aramid fibres serve as strain relief and as reinforcement in case of fire
- ◆ Easy mounting by use of diverse fasteners
- ◆ Branching of cable routes via connection boxes
- ◆ Constant sensor monitoring via control and evaluation unit LISTcontroller
- ◆ Quick cable repair in case of mechanical damage
- ◆ To be used with control and evaluation unit LISTcontroller

## General Data

- ◆ Operating temperature: -40 °C ... +85 °C, up to +200 °C short term
- ◆ Measurement range: -40 °C ... +200 °C
- ◆ Cable diameter: Typ. 18 mm
- ◆ Flat conductor resistance: Typ. 85 Ω / km (single conductor)
- ◆ Sheath material: HM4 mixture, halogen-free and flame retardant, according to EN 50267-2-1:1999-04, EN50267-2-2:1999-04, EN 60332-1-2:2005-06, EN 60332-2-2:2005-06, EN 61034-2:2006-03, IEC 60754-1, IEC 60754-2
- ◆ Weight: Typ. 0,45 kg / m
- ◆ Sheath colour: Grey
- ◆ Marking: Consecutive number printed at each sensor location, followed by cable identifier
- ◆ Deliverable cable length: Up to 2.000 m (extended cable routes are realisable by connection boxes)
- ◆ Mounting temperature: ≥ +10 °C
- ◆ Bending radius: ≥ 30 cm
- ◆ Verified and approved to: *Fpr*EN 54-22:2012 by VdS Schadenverhütung, VdS no.: G 213072  
Meets requirements of environmental classification III

## Sensor Specification

- ◆ Measurement resolution: 0,1 °C
- ◆ Repeatability: ± 0,1 K
- ◆ Sensor address range: 0 ... 999
- ◆ Supply voltage: 15 V DC via LISTcontroller

## Ordering Information


- |   |                                   |
|---|-----------------------------------|
| ◆ <b>Sensor Cable SEC 20/02</b> (2 m sensor spacing)  | Art.-no.: <b>62-2000385-00-00</b> |
| ◆ <b>Sensor Cable SEC 20/03</b> (3 m sensor spacing)  | Art.-no.: <b>62-2000387-00-00</b> |
| ◆ <b>Sensor Cable SEC 20/04</b> (4 m sensor spacing)  | Art.-no.: <b>62-2000388-00-00</b> |
| ◆ <b>Sensor Cable SEC 20/05</b> (5 m sensor spacing)  | Art.-no.: <b>62-2000389-00-00</b> |
| ◆ <b>Sensor Cable SEC 20/08</b> (8 m sensor spacing)  | Art.-no.: <b>62-2000393-00-00</b> |
| ◆ <b>Sensor Cable SEC 20/10</b> (10 m sensor spacing) | Art.-no.: <b>62-2000394-00-00</b> |

## Scope of Delivery

- ◆ Ordered sensor cable length may either be shipped on a one way drum, or on loaner KTG-drum and pallet.

**Cable Construction**

- ◆ Four-core flexible flat cable with hybrid circuits
- ◆ Filler material with strain relief
- ◆ Aluminium foil shield
- ◆ Sheath with imprints at each sensor location

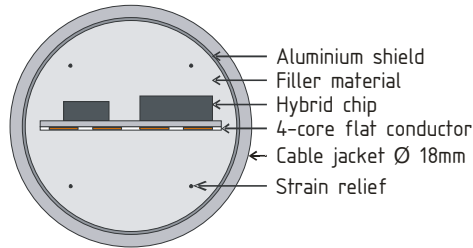

**Cable Imprint**

**Imprint 1:** The sensor marking is used in cable lists, delivery notes etc.

xxxx \* LIST-Sensorkabel \* Kyyy \* Listec GmbH \* Nexans \* VdS Nr. G 213072 \*

Both imprints start on the same level


\*\*\*\*\* LIST Sensor Cable SEC 20 \*\*\*\*\* FprEN54-22:2012 - Umweltgruppe III \*\*\*\*\*

**Imprint 2:** Static marking only.

Every block with 5 x \*

**Legend:**

- xxxx:** Sensor position in the cable, four-digit consecutive sensor marking, at 3 m sensor spacing with a leading "0" (zero).
- yyy:** Three-digit cable number

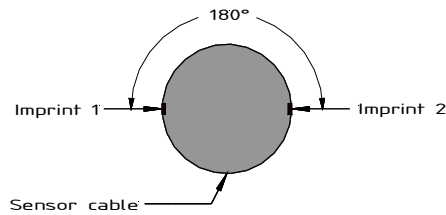

Securiton AG  
 Alarm and Security Systems  
 Alpenstrasse 20, CH-3052 Zollikofen  
 Tel. +41 31 910 11 22, Fax +41 31 910 16 16  
 www.securiton.com, info@securiton.com

Securiton GmbH  
 Alarm and Security Systems  
 Sales Department Germany  
 Von-Drais-Strasse 33, D-77855 Achern/Baden  
 Tel. +49 78 41 62 23-0, Fax +49 78 41 62 23-10  
 www.securiton.de, info@securiton.de

LISTEC® and LIST® are registered trade marks

Subject to change without prior notice!

Manufacturer: LISTEC GmbH • Am Sandberg 34 • D-84424 Isen  
 Tel. +49 (0) 8083 5385-0 • Fax +49 (0) 8083 5385-20  
 www.listec-gmbh.de • info@listec-gmbh.de  
 A company of the Swiss Securitas Group