


Relay Module RELMOD

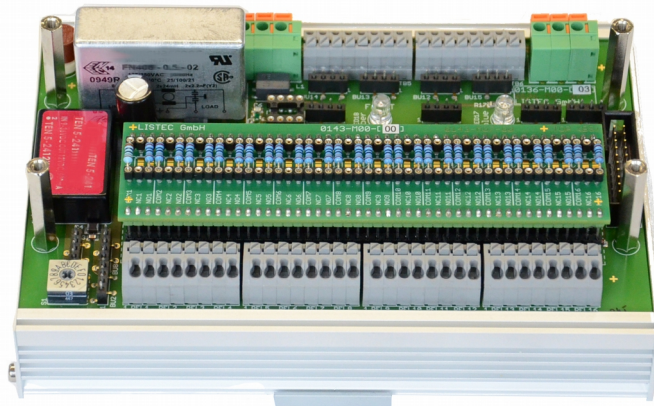

Features

- ◆ Relay extension for LISTcontrollers to signal alarm and fault statuses to superordinate systems (**FACP** and/or **PLC**)
- ◆ Up to 16 relay modules are addressable per LISTcontroller
- ◆ Contact multiplication programmable
- ◆ Activation of a single relay by multiple zones programmable
- ◆ Highly durable via utilisation of maintenance-free components in a modular configuration, **RoHS** compliant
- ◆ Very low energy consumption
- ◆ Coding Switch for module address (1 ... 16)
- ◆ Inputs to remotely activate revision-mode and to initiate alarm simulations
- ◆ Inputs for external alarm- and fault-handling signals
- ◆ Input to trigger timer-controlled deactivation of differential temperature monitoring

Displays at Relay Module

- ◆ Operation: **LED orange**
- ◆ Data transmission: **LED blue**
- ◆ Fault: **LED orange**

Connections and Interfaces

- ◆ 24 V DC: Power supply
- ◆ **COM** (In / Out): **RS485** interfaces to LISTcontroller or further relay module
- ◆ Optocoupler inputs: For external signal input
- ◆ Relay outputs: For signalling of alarms, pre-signals, frost-alarms and faults to superordinate systems (**FACP** and/or **PLC**)

General Data


- ◆ Operating temperature: 0 °C ... +70 °C
- ◆ Dimensions: 167x 113,3 x 66,2 mm (w x h x d), snap on to 35 mm DIN-Rail
- ◆ Case material: Aluminium with transparent acrylic glass shield above main components
- ◆ Weight: 0,61 kg
- ◆ Power supply: 10 V ... 36 V DC
- ◆ Current draw: 56 mA (normal operation) / 105 mA (alarm), at 24 V DC
- ◆ Power consumption: Max. 2,5 W
- ◆ Relay outputs: 16 x toggle contacts for alarm, pre-signal, frost-alarm and fault (loop resistors may be inserted for closed-circuit monitoring)
- ◆ Switching voltage: 48 V DC / 32 V AC max.
- ◆ Switching current: 250 mA max. (resistive load)
- ◆ Optocoupler inputs: 8 x electrically isolated, 5...28 V DC signals

Ordering Information

- ◆ **Relay Module RELMOD** Art.-no.: **62-2000413-00-00**
For use with a LISTcontroller

Scope of Delivery

- ◆ Relay Module for DIN-Rail installation

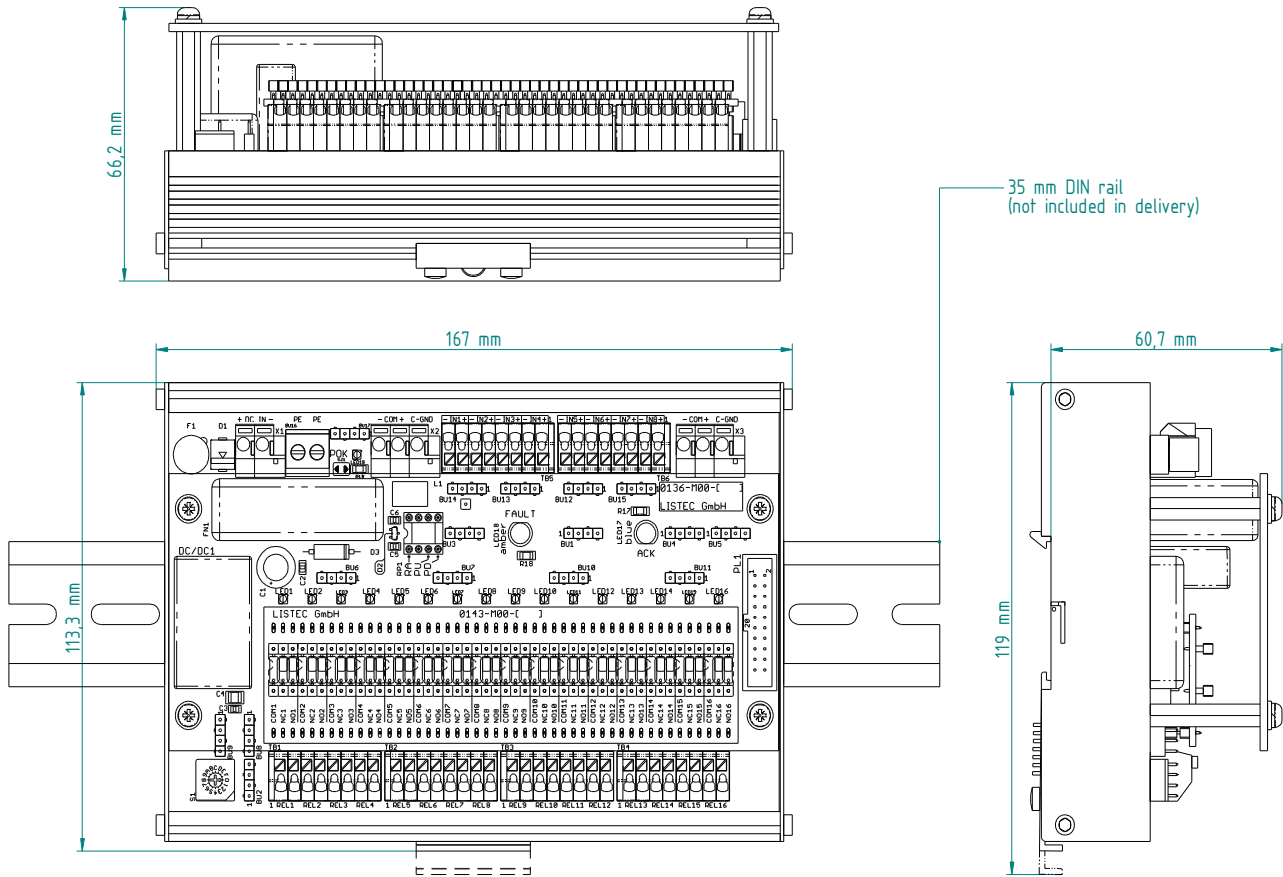Dimensions


Securiton AG
Alarm and Security Systems
 Alpenstrasse 20, CH-3052 Zollikofen
 Tel. +41 31 910 11 22, Fax +41 31 910 16 16
 www.securiton.com, info@securiton.com

Securiton GmbH
Alarm and Security Systems
 Sales Department Germany
 Von-Drais-Strasse 33, D-77855 Achern/Baden
 Tel. +49 78 41 62 23-0, Fax +49 78 41 62 23-10
 www.securiton.de, info@securiton.de

LISTEC® and LIST® are registered trade marks

Subject to change without prior notice!

Manufacturer: LISTEC GmbH • Am Sandberg 34 • D-84424 Isen
 Tel. +49 (0) 8083 5385-0 • Fax +49 (0) 8083 5385-20
 www.listec-gmbh.de • info@listec-gmbh.de
 A company of the Swiss Securitas Group